

Instructions for LEDM100D LED Monolight

For Your Safety

To prevent damage to your light or injury to others, please read the following safety precautions in its entirety before using this equipment. Keep these safety instructions where all those who use this equipment will read them.

Do not disassemble or modify

This light contains high voltage components. Failure to observe this precaution may result in electric shock and/or product malfunction. Should the light break open as the result of a fall or other accident, be sure to disconnect the power and take the light to an authorized maintenance center for inspection.

Keep Dry


Moisture can cause electric shock. Do not handle with wet hands. This light should not be immersed in or exposed to water or rain. Failure to observe this precaution could result in fire or electric shock.

Keep out of reach of children

This light contains small parts that may pose a choking hazard. Consult a physician immediately if a child swallows any part of this light.

Do not expose to high temperatures

Do not leave this light in a closed vehicle, in direct sunlight, or in other areas subject to extreme heat. Failure to observe this precaution could result in fire or damage to the casing or internal components.

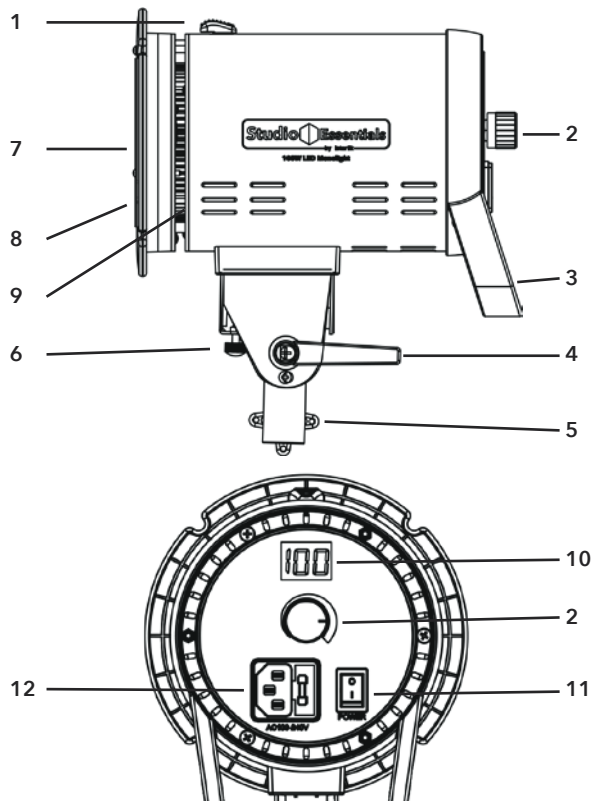

Caution

1. High-power LED's produce a lot of heat. The Radiator [9] will be hot after prolonged use. Do not touch the radiator or attach the Protective Shipping Cap for at least fifteen minutes after use.
2. Be sure to allow the light to fully cool before storage. Failure to do so may result in damage to the light or storage case.
3. Do not touch the LED. Oils from your fingers will shorten the life of the diode.
4. Avoid sudden impacts as this can damage the head and/or LED.
5. When not in use, disconnect from the power supply.

Getting Started

Mounting to the Light Stand

Loosen the Stand Mount Lock [5]. Place the light onto a light stand with a standard 5/8" mount. Re-tighten the Stand Mount Lock [5].

Adjusting the Head Angle

While holding on to the Adjustment Handle [3], loosen the Tilt Lock [4]. Position the light where you need it and re-tighten the lock.

Turning on the Light

Plug the power cable into the Power Socket [12], then into a 110v/60Hz AC outlet. Turn on the light with the Power Switch [11].

Adjusting the Brightness

Use the Dimmer Knob [2] to adjust the brightness from 100 (full power) to 00 (lowest power). Power output is displayed on the LCD Display [10].

Attaching Modifiers

- **Bowens S-Type Modifiers** - Insert the three prongs of the modifier ring into the Bowens S-Type Mount [7] and rotate clockwise until you hear a click. To remove the modifier, pull back on the Modifier Quick Release [1] on the top of the light to release the lock and rotate the modifier counter clockwise.
- **Pop-up Softboxes** - Pull the four sides of the light opening of the softbox around the outside of the Pop-up Softbox Ring [8] and tension will hold it in place.

Anatomy of the Light

- | | |
|---------------------------|-----------------------------|
| 1. Modifier Quick Release | 7. Bowens S-Type Mount |
| 2. Dimmer Knob | 8. Pop-up Softbox Ring |
| 3. Adjustment Handle | 9. Radiator |
| 4. Tilt Lock | 10. LCD Display |
| 5. Stand Mount Lock | 11. Power Switch |
| 6. Umbrella Mount | 12. Power Socket & Fuse Box |

What's Included

- LED Monolight
- Protective Shipping Cap
- Power Cable
- 24" (60cm) Pop-up Softbox